


# DOWEL SCREWS

ECOM  
Fasteners

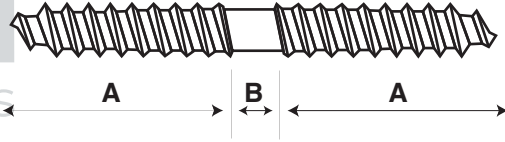

DOWEL SCREWS								Hanger Bolt & Stud			
Diameter & Thread Pitch	Overall Length	A	B	Diameter & Thread Pitch	Overall Length	A	B	Diameter & Thread Pitch	Overall Length	A	B
		Thread Lengths	Collar Length			Thread Lengths	Collar Length			Thread Lengths	Collar Length
#6-18	3/4	3/8	-	1/4-10	1-3/4	3/4	1/4	5/16-9	6	2-1/4	1-1/2
	1	3/8	1/4		2	7/8	1/4		3/8-7	2	7/8
#8-15	1	1/2	-		2-1/2	1-1/8	1/4	2-1/2		1-1/8	1/4
	1-1/4	5/8	-		3	1-3/8	1/4	3		1-3/8	1/4
	1-1/2	5/8	1/4		3-1/2	1-5/8	1/4	3-1/2		1-5/8	1/4
3/16-11	1	1/2	-		5/16-9	1-1/2	3/4	-	1/2-6	4	1-5/8
	1-1/4	1/2	1/4	1-3/4		3/4	1/4	4-1/2		2-1/4	-
	1-1/2	3/4	-	2		7/8	1/4	5		2-1/4	1/2
	1-3/4	3/4	1/4	2-1/2		1-1/8	1/4	6		2-1/4	1-1/2
	2	7/8	1/4	3		1-3/8	1/4	8		3	2
	2-1/4	7/8	1/2	3-1/2		1-5/8	1/4	4		2	-
	2-1/2	1-1/8	1/4	4		1-5/8	3/4	5		2	1
	3	1-3/8	1/4	4-1/2		2-1/4	-	6		3	-
1/4-10	1-1/2	3/4	-	5		2-1/4	1/2	8	3	2	

Tolerance on Length

Up to 6": ± 1/16"

Over 6": ± 1/8"

ECOM  
Fasteners

<b>Description</b>	A headless fastener with a lag thread at both ends. They are designed to be inserted into a predrilled pilot hole. The end of the wood thread is designed as a taper that is threaded all the way to its blunt tip.
<b>Applications / Advantages</b>	Used for fastening two pieces of wood so as to keep them permanently in their proper relative position, usually set apart from each other.
<b>Material</b>	AISI 1008 & 1010 steel
<b>Core Hardness</b>	<i>3/16 through 3/8 in. diameter, all lengths:</i> Rockwell B70 - B100
<b>Tensile Strength</b>	<i>3/16 through 3/8 in. diameter, all lengths:</i> 60,000 psi. minimum
<b>Plating</b>	See Appendix-A for plating information.

ECOM  
Fasteners