


3/8" Wide Contact Area

CABLE CLAMPS

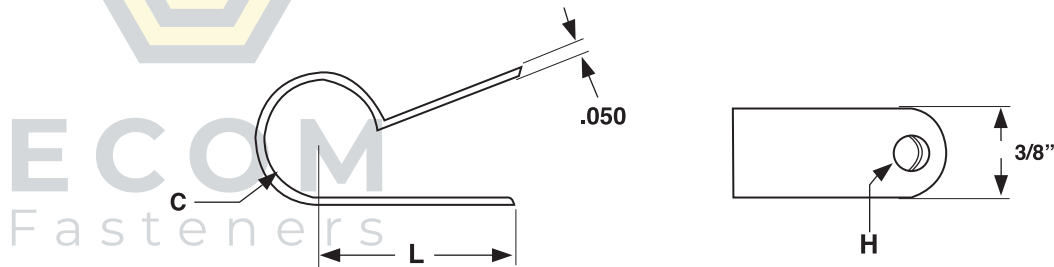

NYLON STANDARD CABLE CLAMPS—3/8" WIDE CONTACT AREA

Part Number	Size (Clamping Diam. x Hole Size x Contact Length)	C		H		L	
		Clamping Diameter		Hole Size		Hole-to-Clamp Length	
		Max	Min	Max	Min	Max	Min
125140CCN06	1/8x.140x.329	.130	.120	.155	.125	.344	.314
125167CCN06	1/8x.167x.329	.130	.120	.182	.152	.344	.314
125203CCN06	1/8x.203x.329	.130	.120	.218	.188	.344	.314
188140CCN06	3/16x.140x.430	.193	.183	.155	.125	.445	.415
188167CCN06	3/16x.167x.430	.193	.183	.182	.152	.445	.415
188203CCN06	3/16x.203x.430	.193	.183	.218	.188	.445	.415
250140CCN06	1/4x.140x.410	.255	.245	.155	.125	.425	.395
250167CCN06	1/4x.167x.410	.255	.245	.182	.152	.425	.395
250203CCN06	1/4x.203x.410	.255	.245	.218	.188	.425	.395
312140CCN06	5/16x.140x.495	.317	.307	.155	.125	.510	.480
312167CCN06	5/16x.167x.495	.317	.307	.182	.152	.510	.480
312203CCN06	5/16x.203x.495	.317	.307	.218	.188	.510	.480
375140CCN06	3/8x.140x.595	.380	.370	.155	.125	.610	.580
375167CCN06	3/8x.167x.595	.380	.370	.182	.152	.610	.580
375203CCN06	3/8x.203x.595	.380	.370	.218	.188	.610	.580
438167CCN06	7/16x.167x.574	.443	.433	.182	.152	.589	.559
438203CCN06	7/16x.203x.574	.443	.433	.218	.188	.589	.559
500140CCN06	1/2x.140x.605	.505	.495	.155	.125	.620	.590
500167CCN06	1/2x.167x.605	.505	.495	.182	.152	.620	.590
500203CCN06	1/2x.203x.605	.505	.495	.218	.188	.620	.590
625203CCN06	5/8x.203x.678	.630	.620	.218	.188	.693	.663

<b>Description</b>	A molded nylon component formed into a shape that creates a cylindrical area through which wires or cables may pass. The part holds its shape until manual pressure is applied to the two flat ends to join them together. A hole in the center of the two flat ends allows for a screw to pass through and be fastened with a nut to securely close the clamp once the cables it is to hold are in place. The edges of the two ends are rounded. The size is marked on each clamp. The standard series has a 3/8" wide contact area.
<b>Applications/ Advantages</b>	Designed for medium to lightweight applications that involve securing, insulating and routing cable wiring, tubing and fiber optic cable.
<b>Material</b>	Flame Retardant Nylon 6/6
<b>Continuous Use Temperature</b>	220° F
<b>Melting Point</b>	470° F