



LOW HEAD CAP SCREWS Alloy Steel

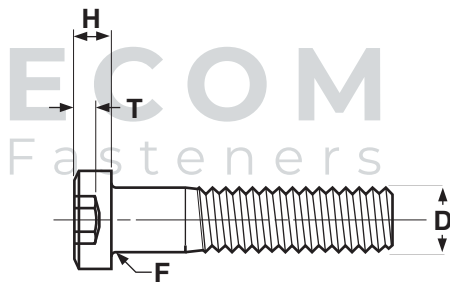

LOW HEAD SOCKET CAP SCREWS - ALLOY STEEL											ASME B18.3 2012 Blue Devil®	
Nominal Size	D Basic Screw Diameter	F Body Diameter		A Head Diameter		H Head Height		J Hex Socket Size	T Key Engagement	Tensile Strength Pounds Min.		Tightening Torque Inch Pounds
		Max	Min	Max	Min	Max	Min			UNRC	UNRF	
8	0.1640	.1640	.1585	.270	.265	.085	.079	.078	.060	2,310	2,440	19.4
10	0.1900	.1900	.1840	.312	.307	.098	.092	.094	.072	2,890	3,300	33.5
1/4	0.2500	.2500	.2435	.375	.369	.127	.121	.125	.094	5,250	6,000	77.9
5/16	0.3125	.3125	.3053	.437	.431	.158	.152	.156	.110	8,650	9,550	156.0
3/8	0.3750	.3750	.3678	.562	.556	.192	.182	.188	.115	12,800	14,450	273.0
1/2	0.5000	.5000	.4919	.750	.743	.254	.244	.250	.151	23,400	26,350	615.0

Tolerance on Length	Nominal Screw Size	Nominal Screw Length	
		Up to 1 in., Incl.	Over 1 in. to 2-1/2 in., Incl.
		0 thru 3/8	-0.03
	1/2	-0.03	-0.06

Description	Similar to a standard alloy socket cap screw except the head height is 50% of the standard's and the socket size is smaller. The low-head style is supplied only in plain steel.
Applications/ Advantages	Used in applications where the limited clearance would not accommodate the head height of a standard socket cap screw. Also used in counterbored holes of material too thin for a regular socket cap screw. However, because of their design, they cannot withstand the same preloads as a standard socket head.
Material	Cap screws shall be made from an alloy steel which conforms to the following chemical composition requirements (per product analysis)-- Carbon: 0.31% minimum; Phosphorus: 0.040% maximum; Sulfur: 0.045% maximum. Also, one or more of the following elements shall be present in sufficient quantity to meet the performance requirements listed below: chromium, nickel, molybdenum or vanadium.
Heat Treatment	Cap screws shall be heat treated by oil quenching from above the transformation temperature and then tempered at a temperature not lower than 650°F.
Hardness	Rockwell C38 minimum
Tensile Strength	170,000 psi. minimum
Yield Strength	150,000 psi. minimum
Elongation	10% minimum (applies to machined specimens of lengths at least 4D where D equals the nominal diameter of the screw)
Reduction of Area	33% minimum (applies to machined specimens)